

# College Blind™

a maintenance-free blind  
for teaching areas

## FEATURES

**MAINTENANCE FREE** the College Blind is built to last, even in the harshest conditions, with a five year guarantee, and normally requires no maintenance, thanks to strong components and original design. The fabric is firmly anchored in the fabric roller and bottom profile and cannot be pulled out.

**STRONG FABRIC ROLLER** allows blind widths up to four metres which often saves costs by reducing the number of blinds required on a project.

**CABLE SIDE GUIDES** stainless steel cables can't be cut with scissors and ensure the blind is held steady if the windows are opened for natural ventilation. Fabrics are available with good porosity to allow air exchange.

**OPERATION** strong crank handles take the effort out of operation, and have locks to prevent over winding.



## TECHNICAL

**DESCRIPTION** Strong, maintenance free roller blind for glare control or room darkening with side guides to allow natural ventilation, operated by crank handle or electric motor.

**FABRICS** Fabrics are available for glare control or room darkening. Glare control fabrics can have varying degrees of openness, to allow a view outside and may also be translucent, so that the need for artificial lighting is reduced. Porous fabrics allow good air exchange for natural ventilation. Room darkening fabrics are opaque.

All fabrics are flame retardant to British and Continental standards. All fabrics have insulating properties which help significantly in achieving energy savings. Technical data is available.

**GUARANTEE** 5 years.

## PRODUCT


**APPLICATION** the College Blind has proved highly successful in teaching and communal areas in FE colleges, secondary and primary schools for glare control or room darkening.

**OPERATION** manual or electric. Manual operation is by gearbox and crank rod with folding handle, which may be removable to prevent unauthorised use. Crank rod operation avoids the ligature risk and frequent breakages associated with cords and chains. Crank rods will also operate at an angle, for example across benches in a science room. Electric operation is by 240v motor installed in the fabric roller. Group and automatic control systems are available.

**SIZES** approximate maximum sizes: width 4.0 metres; height: 4.0 metres; area: 13 square metres. Maximum sizes may vary according to the weight of fabric used.

**GRAPHICS** standard fabrics are excellent for printing logos, text or images in one or more colours.

## PROJECT

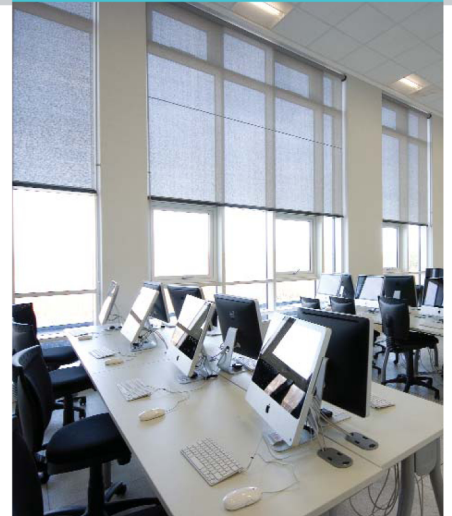

College Blinds helped achieve a 'very good' BREEAM rating at South Cheshire College's £75 million new campus.

## SPECIFICATION

College blind available from authorised distributors (for details please visit [www.aluzion.co.uk](http://www.aluzion.co.uk))

**FABRIC** [ ] glare control/insulating fabric from Aluzion standard ranges  
[ ] opaques for room darkening

To be installed and commissioned in accordance with Aluzion instructions and recommended procedures.

[www.umbrashading.co.uk](http://www.umbrashading.co.uk)  
[sales@umbrashading.co.uk](mailto:sales@umbrashading.co.uk) | 0845 677 0020

**Umbra**  
BRIGHTER SHADING